
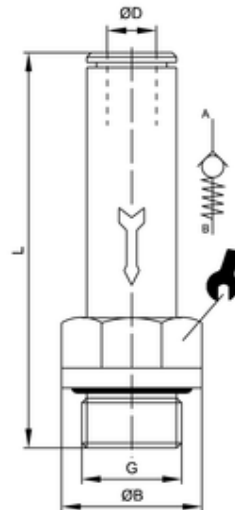


ipso 033

Rückschlagverschraubung
 Straight connection with non-return valve
 Diritto maschio cilindrico con valvola di non ritorno con
 O-Ring

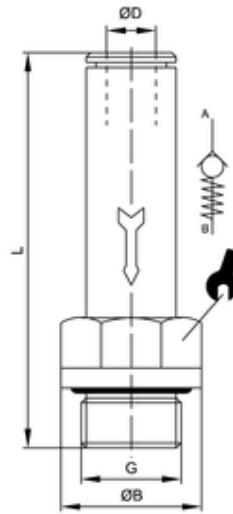

| ITV | ØD | G | ØB | L | sw |
|--------|----|----|----|----|----|
| 203301 | 4 | M5 | 8 | 42 | 9 |

| | |
|--------------------------|--------------------------|
| Körper: | CW614N vernickelt |
| Body: | CW614N nickel-plated |
| Corpo: | ottone CW 614N nichelato |
| O-Ring: | NBR |
| O-Ring: | NBR |
| O-Ring: | NBR 70 SH |
| zyl. Gewinde: | DIN EN ISO 228 |
| cyl. Threads: | DIN EN ISO 228 |
| Filettatura: | gas cilindrica ISO 228 |
| Betriebstemperatur: | -20°C bis +80°C |
| Working temperature: | -20°C up to +80°C |
| Temperatura di utilizzo: | da -20°C a +80°C |
| Betriebsdruck: | 0,2 - 10 bar |
| Working pressure: | 0,2 - 10 bar |
| Pressione di utilizzo: | da 0,2 a 10 bar |

für geölte und ungeölte Druckluft

for lubricated and non-lubricated compressed air
per aria compressa sia lubrificata che non