
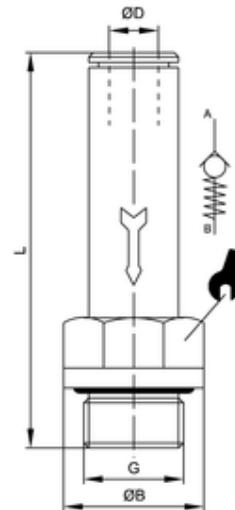


# ipso 033

Rückschlagverschraubung  
 Straight connection with non-return valve  
 Diritto maschio cilindrico con valvola di non ritorno con O-Ring

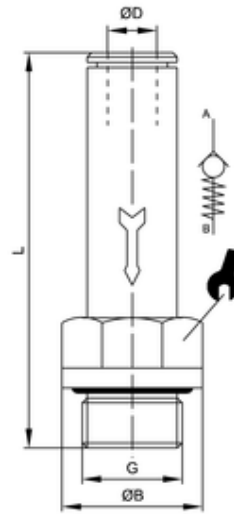

ITV	ØD	G	ØB	L	sw
203307	6	G1/8	13	39,0	13

Körper:	CW614N vernickelt
Body:	CW614N nickel-plated
Corpo:	ottone CW 614N nichelato
O-Ring:	NBR
O-Ring:	NBR
O-Ring:	NBR 70 SH
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20°C bis +80°C
Working temperature:	-20°C up to +80°C
Temperatura di utilizzo:	da -20°C a +80°C
Betriebsdruck:	0,2 - 10 bar
Working pressure:	0,2 - 10 bar
Pressione di utilizzo:	da 0,2 a 10 bar

für geölte und ungeölte Druckluft

for lubricated and non-lubricated compressed air  
per aria compressa sia lubrificata che non