
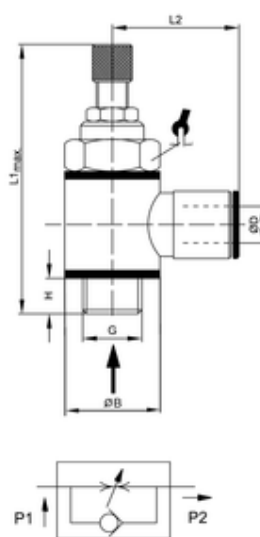


ipso 040

Drosselrückschlagventil mit Steckverschraubung und Rändelkopf, Typ B, Abluft drosselbar

Flow regulator with push-in fittings and handwheel regulator type B

Regolatore di flusso manuale unidirezionale per cilindri tipo B

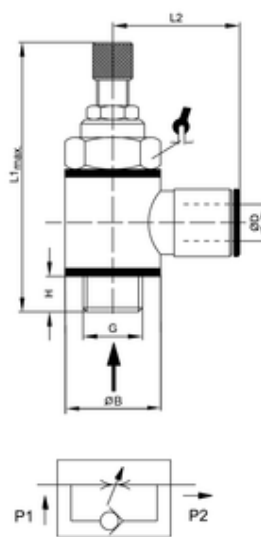

| ITV | ØD | G | H | ØB | L1 max | L2 | sw | NI/min* |
|--------|----|------|---|----|--------|------|----|---------|
| 204003 | 8 | G1/8 | 5 | 14 | 49 | 24,5 | 14 | 340 |

| | |
|---------------------------------|-------------------------|
| Körper: | CW617N vernickelt |
| Body: | CW617N nickel-plated |
| Corpo: | ottone CW617N nichelato |
| O-Ring: | NBR |
| O-ring: | NBR |
| O-Ring: | NBR 70 SH |
| Dichtungen: | Kunststoff |
| Seals: | Plastics |
| Rondella di tenuta sul filetto: | tecnopolimero |
| zyl. Gewinde: | DIN EN ISO 228 |
| cyl. Threads: | DIN EN ISO 228 |
| Filettatura: | gas cilindrica ISO 228 |
| Betriebstemperatur: | -20 °C bis +70 °C |
| Working temperature: | -20 °C up to +70 °C |
| Temperatura di utilizzo: | da -20 °C a +70 °C |
| Betriebsdruck: | max. 10 bar |

Working pressure: max. 10 bar

Pressione di utilizzo: max. 10 bar

Für geölte und ungeölte Druckluft.

For lubricated and non-lubricated compressed air.

Per aria compressa sia lubrificata che non.
