


## SPL

Schalldämpfer - Kunststoff  
Silencer - plastic

Material: Kunststoff  
Filterfeinheit: 36 $\mu$   
Betriebsdruck: max. 10 bar  
Betriebstemperatur: -10°C bis +70°C  
zyl. Gewinde: DIN EN ISO 228

material: plastics  
filter mesh: 36 $\mu$   
working pressure: max. 10 bar  
working temperature: -10°C up to +70°C  
cyl. threads: DIN EN ISO 228

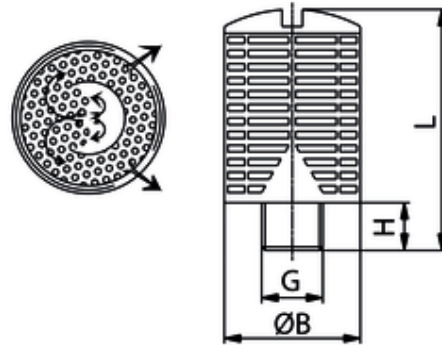

<i>ITV</i>	<i>G</i>	<i>ØB</i>	<i>H</i>	<i>L</i>
303115	G1/2	24,5	11	58