


SPL

Schalldämpfer - Kunststoff
Silencer - plastic

Material: Kunststoff
Filterfeinheit: 36 μ
Betriebsdruck: max. 10 bar
Betriebstemperatur: -10°C bis +70°C
zyl. Gewinde: DIN EN ISO 228

material: plastics
filter mesh: 36 μ
working pressure: max. 10 bar
working temperature: -10°C up to +70°C
cyl. threads: DIN EN ISO 228

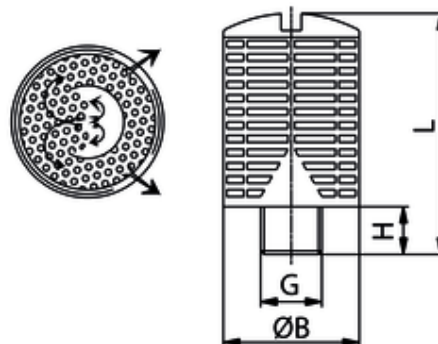

<i>ITV</i>	<i>G</i>	<i>ØB</i>	<i>H</i>	<i>L</i>
303119	G1/8 IG	15	6	32,5