
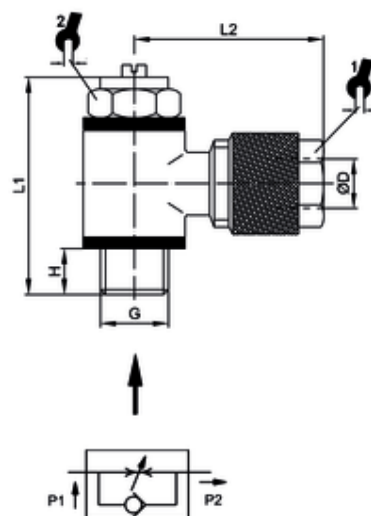


# Drosselrückschlagventil mit Ringstück

Typ B Abluft drosselbar

Unidirectional flow regulator, Type B for cylinders

Regolatore di flusso unidirezionale per cilindro con anello a calzamento

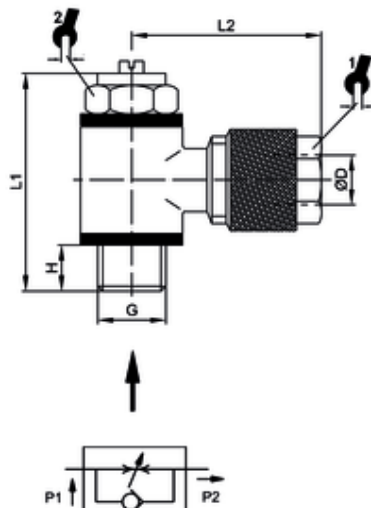

ITV	ØD	G	H	L1	L2	sw1	sw2	NI/min*
304207	8/6	G3/8	6	46	24,5	12	20	500

Körper:	CW617N vernickelt
Body:	CW617N nickel-plated
Corpo:	ottone CW 617N nichelato
O-Ring:	NBR
O-Rings:	NBR
O-Ring:	NBR 70 SH
Dichtungen:	Kunststoff
Seals:	Plastics
Rondella di tenuta sul filetto:	tecnopolimero
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20°C bis +70°C
Working temperature:	-20°C up to +70°C

Temperatura di utilizzo da -20°C a +70°C

Betriebsdruck: max. 10 bar

Working pressure: max. 10 bar

Pressione di utilizzo: max. 10 bar

für geölte und ungeölte Druckluft

for lubricated and non-lubricated compressed air

per aria compressa sia lubrificata che non