
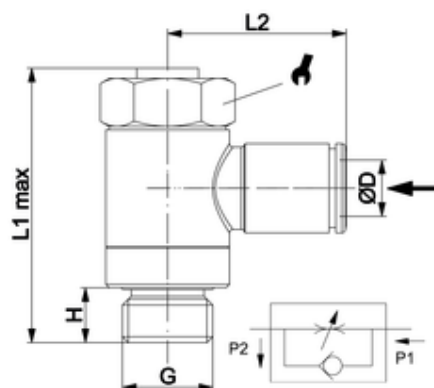


STX 028 Edelstahl

Drosselrückschlagventil mit Ringstück, Typ A, Zuluft drosselbar

Unidirectional flow regulator type A for valves (stainless steel)

Regolatore di flusso unidirezionale per cilindro tipo A - Inox

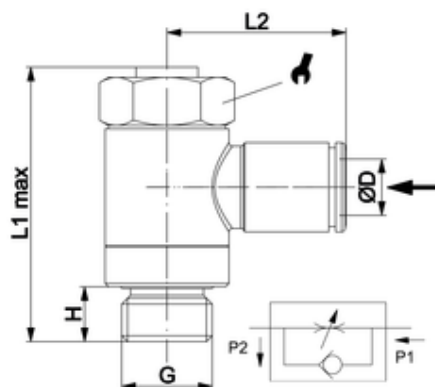

ITV	ØD	G	H	L1 max	L2	sw
304706-ES	6	G1/4	8,0	40	24,5	17

Körper: AISI 316L

Body: AISI 316L

Corpo: AISI 316L

O-Ring: FKM

O-ring: FKM

O-Ring: FKM

Dichtungen: FKM

Seals: FKM

Rondella di tenuta sul filetto: FKM

zyl. Gewinde: DIN EN ISO 228

cyl. Threads: DIN EN ISO 228

Filettatura: gas cilindrica ISO 228

Betriebstemperatur: -20 °C bis +150 °C

Working temperature: -20 °C up to +150 °C

Temperatura di utilizzo: da -20 °C a +150 °C

Betriebsdruck: -0,98 bis 16 bar

Working pressure: -0,98 up to 16 bar

Pressione di utilizzo: da -0,98 a 16 bar

Für geölte und ungeölte Druckluft.

For lubricated and non-lubricated compressed air.

Per aria compressa sia lubrificata che non.