


Standrohrverschraubung

Blank
Parallel straight adaptor, uncoated

Betriebstemperatur: max. 150°C
Betriebsdruck: bis 60bar
Werkstoff: Messing vernickelt/ blank CW614N und CW617N
Gewinde: zyl. Gewinde DIN 3852
 kon. Gewinde DIN 3858

Medium: Luft, Wasser, Öl, Dampf, etc.

Operating temperature: max. 150°C
Operating pressure: up to 60bar
Material: brass nickel-plated/ polished CW614N and CW617N
Thread: cyl. thread DIN 3852
 con. thread DIN 3858
Medium: Air, water, oil, steam, etc.

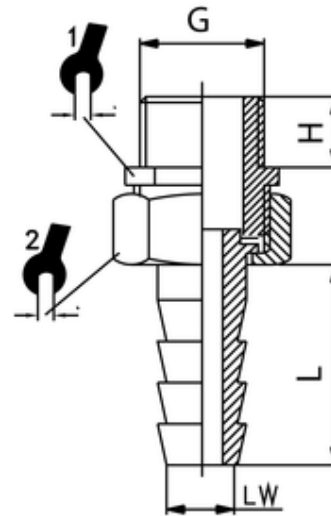

| ITV | G | LW | H | L | sw1 | sw2 |
|--------|------|----|---|----|-----|-----|
| 401401 | G3/8 | 10 | 9 | 22 | 22 | 27 |