


# Doppelnippel, zylindrisch

Doppelnippel, zylindrisch  
Double nipple, cylindrical

**Betriebstemperatur:** max. 150°C  
**Betriebsdruck:** bis 60bar  
**Werkstoff:** Messing vernickelt/ blank CW614N und CW617N  
**Gewinde:** zyl. Gewinde DIN 3852  
 kon. Gewinde DIN 3858  
**Medium:** Luft, Wasser, Öl, Dampf, etc.

**Operating temperature:** max. 150°C  
**Operating pressure:** up to 60bar  
**Material:** brass nickel-plated/ polished CW614N and CW617N  
**Thread:** cyl. thread DIN 3852  
 con. thread DIN 3858  
**Medium:** Air, water, oil, steam, etc.

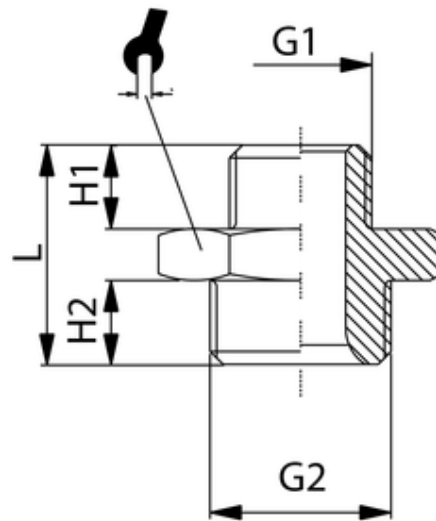

| ITV    | G1     | G2     | L  | H1 | H2 | SW |
|--------|--------|--------|----|----|----|----|
| 401521 | G1 1/4 | G1 1/4 | 37 | 15 | 15 | 42 |