


# Doppelnippel, zylindrisch

Doppelnippel, zylindrisch  
Double nipple, cylindrical

**Betriebstemperatur:** max. 150°C  
**Betriebsdruck:** bis 60bar  
**Werkstoff:** Messing vernickelt/ blank CW614N und CW617N  
**Gewinde:** zyl. Gewinde DIN 3852  
 kon. Gewinde DIN 3858  
**Medium:** Luft, Wasser, Öl, Dampf, etc.

**Operating temperature:** max. 150°C  
**Operating pressure:** up to 60bar  
**Material:** brass nickel-plated/ polished CW614N and CW617N  
**Thread:** cyl. thread DIN 3852  
 con. thread DIN 3858  
**Medium:** Air, water, oil, steam, etc.

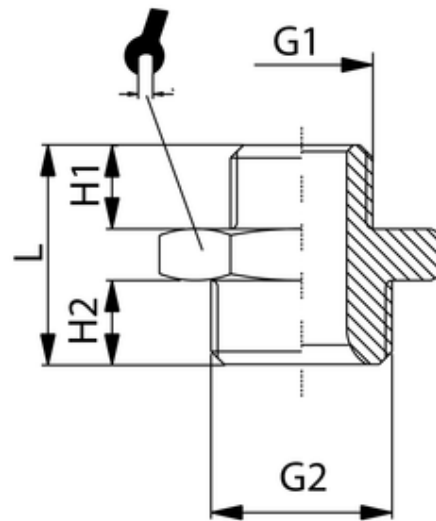

| ITV    | G1 | G2     | L  | H1 | H2 | SW |
|--------|----|--------|----|----|----|----|
| 401526 | G2 | G2 1/2 | 57 | 22 | 22 | 80 |