301 z

Gerade Einschraubverschraubung zyl. mit O-Ring
Straight male adaptor cyl. with O-ring
Diritto maschio cilindrico con O-Ring

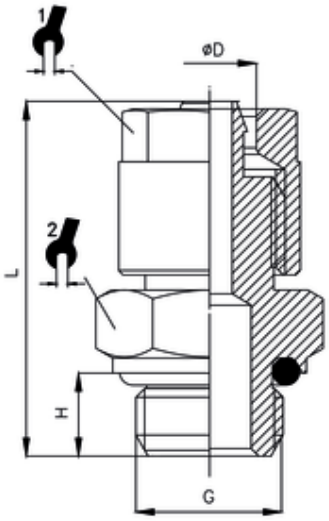

ITV	ØD	G	H	L	sw1	sw2
10212	8/6	G1/8	5,5	23	12	14

Betriebstemperatur:	-20°C bis +80°C (NBR-Dtg.) -20°C bis +70°C (PVC-Dtg.)	abhängig vom Temperaturbereich des eingesetzten Schlauches
Betriebsdruck:	bis 20bar	abhängig vom Druckbereich des eingesetzten Schlauches
Werkstoff:	Körper und Überwurfmutter - Messing vernickelt	CW614N und CW617N
	O-Ringe - NBR Dichtungen - PVC	
Gewinde:	zyl. Gewinde DIN EN ISO 228	
	kon. Gewinde DIN EN 10226 metr. Gewinde DIN ISO 262	
Medium:	pneumatische, ölhydraulische und hydraulische Kreisläufe	
Schläuche:	geeignet für diverse Kunststoffschläuche	auch für PVU synthesefadenarmiert

Operating temperature:	*-20°C bis +80°C (NBR-sealing)* *-20°C bis +70°C (PVC-sealing)*	*dependent on temperature range of tube*
Operating pressure:	*up to 20bar*	*dependent on pressure range of tube*
Material:	*Body and Nut - brass nickel-plated*	*CW614N and CW617N*
	O-Rings - NBR *Sealing - PVC*	
Thread:	*cyl. thread DIN EN ISO 228*	
	con. thread DIN EN ISO 10226 *metr. thread DIN ISO 262*	
Medium:	*pneumatic, oil-hydraulic and hydraulic circuits*	
Tubes:	*suitable for various plastic tubes*	*also for reinforced PVU synthetic fibres*