


**Filterregler**  
**Filter regulator**  
**Filtro regolatore**

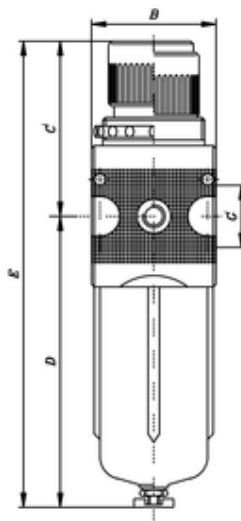

| ITV    | G    | NI/min | B  | C  | D   | E   | BG* |
|--------|------|--------|----|----|-----|-----|-----|
| 132501 | G3/8 | 1.400  | 48 | 67 | 129 | 196 | 25  |

ohne Manometer  
 without manometer  
 senza manometro

|                             |                         |
|-----------------------------|-------------------------|
| Manometeranschluss          | 1/4"                    |
| Pressure gauge thread       | 1/4"                    |
| Attacco manometro (filetto) | 1/4"                    |
| max. Betriebsdruck          | 16 bar                  |
| max. Inlet pressure         | 16 bar                  |
| Pressione max di ingresso   | 16 bar                  |
| max. Temperatur bei 10 bar  | +60 °C                  |
| max. temperature at 10 bar  | +60 °C                  |
| Temperatura max a 10 bar    | +60 °C                  |
| Einbauposition              | vertikal                |
| Mounting position           | vertically              |
| Posizione di montaggio      | verticalmente           |
| Kondensatablass             | manuell                 |
| Drainage system             | manual                  |
| Sistema di drenaggio        | manuale                 |
| Abscheidegrad               | 40 µ                    |
| Degree of filtration        | 40 µ                    |
| Grado di filtrazione        | 40 µ                    |
| Medium                      | gefilterte Luft         |
| Fluid                       | filtered air            |
| Fluido di passaggio         | aria filtrata           |
| Befestigung                 | Winkel oder 2 Bohrungen |
| Fortify                     | elbow or 2 drillings    |
| Fissaggio                   | staffa o 2 fori         |

BG\* - Behältergröße /cm<sup>3</sup> - Bowl capacity /cm<sup>3</sup> - Capacità della tazza /cm<sup>3</sup>