


LUB

Öler
Lubricator
Lubrificatore

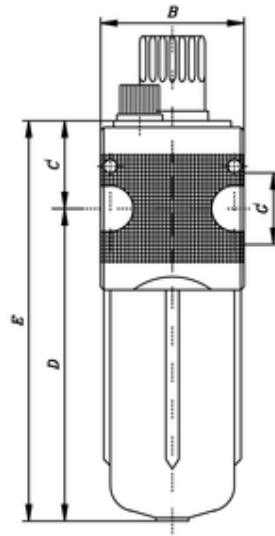

| ITV | G | NI/min | B | C | D | E | BG* |
|--------|------|--------|----|----|-----|-----|-----|
| 142301 | G1/2 | 12.000 | 70 | 65 | 132 | 197 | 125 |

| | |
|----------------------------|-------------------------|
| max. Betriebsdruck | 16 bar |
| max. Inlet pressure | 16 bar |
| Pressione max di ingresso | 16 bar |
| max. Temperatur bei 10 bar | +60 °C |
| max. temperature at 10 bar | +60 °C |
| Temperatura max a 10 bar | +60 °C |
| Einbauposition | vertikal |
| Mounting position | vertically |
| Posizione di montaggio | verticalmente |
| Öldosierung | 1-2 Tropfen/ min. |
| Oil quote | 1-2 drops/ min. |
| Dosaggio dell'olio | 1-2 gocce/ min. |
| Medium | gefilterte Luft |
| Fluid | filtered air |
| Fluido di passaggio | aria filtrata |
| Befestigung | Winkel oder 2 Bohrungen |
| Fortify | elbow or 2 drillings |
| Fissaggio | staffa o 2 fori |

BG* - Behältergröße /cm³ - Bowl capacity /cm³ - Capacità della tazza /cm³