312

Knickschutzfeder mit Mutter
Nut + protective spring
Dado calzamento + molla

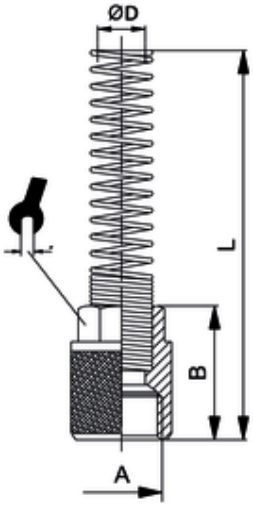

ITV	ØD	A	B	L	sw
17104	12/10	M16x1	27,5	116,5	17

Betriebstemperatur:	-20°C bis +80°C (NBR-Dtg.) -20°C bis +70°C (PVC-Dtg.)	abhängig vom Temperaturbereich des eingesetzten Schlauches
Betriebsdruck:	bis 20bar	abhängig vom Druckbereich des eingesetzten Schlauches
Werkstoff:	Körper und Überwurfmutter - Messing vernickelt O-Ringe - NBR Dichtungen - PVC	CW614N und CW617N
Gewinde:	zyl. Gewinde DIN EN ISO 228 kon. Gewinde DIN EN 10226 metr. Gewinde DIN ISO 262	
Medium:	pneumatische, ölhydraulische und hydraulische Kreisläufe	
Schläuche:	geeignet für diverse Kunststoffschläuche	auch für PVU synthesefadenarmiert

Operating temperature:	*-20°C bis +80°C (NBR-sealing)* *-20°C bis +70°C (PVC-sealing)*	*dependent on temperature range of tube*
Operating pressure:	*up to 20bar*	*dependent on pressure range of tube*
Material:	*Body and Nut - brass nickel-plated* *O-Rings - NBR* *Sealing - PVC*	*CW614N and CW617N*
Thread:	*cyl. thread DIN EN ISO 228* *con. thread DIN EN ISO 10226* *metr. thread DIN ISO 262*	
Medium:	*pneumatic, oil-hydraulic and hydraulic circuits*	
Tubes:	*suitable for various plastic tubes*	*also for reinforced PVU synthetic fibres*