


# ipso 033

Rückschlagverschraubung  
Straight connection with non-return valve  
Diritto maschio cilindrico con valvola di non ritorno con  
O-Ring

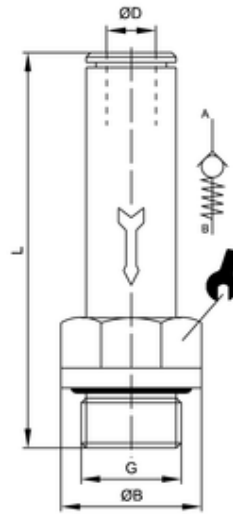

ITV	ØD	G	ØB	L	sw
203310	8	G1/4	16	40	16

Körper:	CW614N vernickelt
Body:	CW614N nickel-plated
Corpo:	ottone CW614N nichelato
O-Ring:	NBR
O-ring:	NBR
O-Ring:	NBR 70 SH
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +80 °C
Working temperature:	-20 °C up to +80 °C
Temperatura di esercizio:	da -20 °C a +80 °C
Betriebsdruck:	0,2 - 10 bar
Working pressure:	0,2 - 10 bar
Pressione di esercizio:	da 0,2 a 10 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	