


# ipso 045

Drosselrückschlagventil mit Ringstück schwenkbar, Typ A, Zuluft drosselbar  
Flow regulator 045 type A  
Regolatore di flusso girevole per valvole tipo A

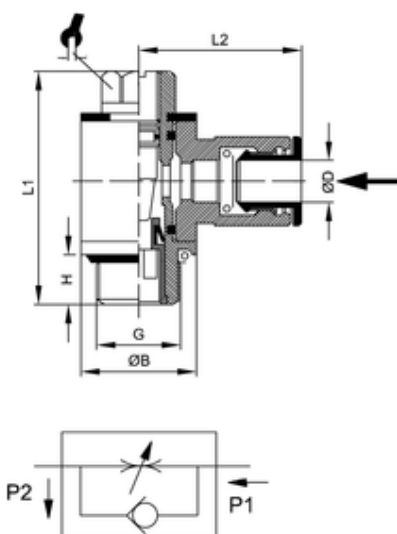

ITV	ØD	G	H	ØB	L1	L2	sw	NI/min*
204507	8	G1/8	6,5	13	32	24,5	9	390

Körper:	CW617N vernickelt
Body:	CW617N nickel-plated
Corpo:	ottone CW617N nichelato
O-Ring:	NBR
O-ring:	NBR
O-Ring:	NBR 70 SH
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +80 °C
Working temperature:	-20 °C up to +80 °C
Temperatura di esercizio:	da -20 °C a +80 °C
Betriebsdruck:	max. 10 bar
Working pressure:	max. 10 bar
Pressione di esercizio:	max. 10 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	