


ipso 052

Drosselrückschlagventil mit Ringstück, Typ A, Zuluft drosselbar
Unidirectional flow regulator type A
Regolatore di flusso unidirezionale tipo A

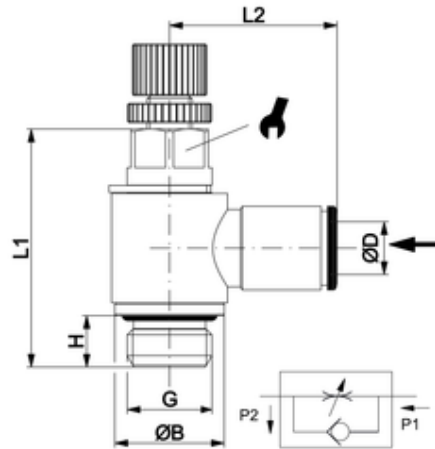

ITV	ØD	G	H	ØB	L1	L2	sw	NI/min*
205209	8	G3/8	7,0	20	41,5	26	14	1050

Körper:	CW617N vernickelt
Body:	CW617N nickel-plated
Corpo:	ottone CW617N nichelato
O-Ring:	NBR
O-ring:	NBR
O-Ring:	NBR 70 SH
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +80 °C
Working temperature:	-20 °C up to +80 °C
Temperatura di esercizio:	da -20 °C a +80 °C
Betriebsdruck:	max. 10 bar
Working pressure:	max. 10 bar
Pressione di esercizio:	max. 10 bar

Für geölte und ungeölte Druckluft.
For lubricated and non-lubricated compressed air.
Per aria compressa sia lubrificata che non.