


Schalldämpfer mit Schlitz
Silencer with nut
Silenziatore a tronco di cono

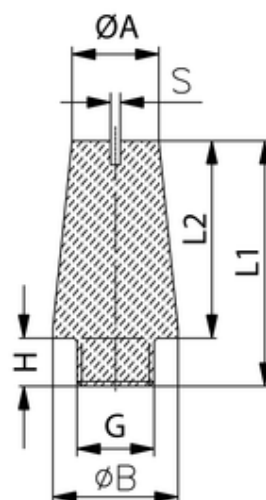

ITV	G	ØB	H	L1	L2	ØA	S
303002	G1/8	11	5,5	21	15,5	8	1,5

Material:	Sinterbronze
Material:	sintered bronze
Materiale:	bronzo sferico sinterizzato
Filterfeinheit	50 µ
filter mesh:	50 µ
Elemento filtrante:	50 µ
Betriebsdruck:	max. 10 bar
Working pressure:	max. 10 bar
Pressione di esercizio	max. 10 bar
Betriebstemperatur:	-10 °C bis +150 °C
Working temperature:	-10 °C up to +150 °C
Temperatura di esercizio:	da -10 °C a +150 °C
zyl. Gewinde:	DIN EN ISO 228-1
cyl. threads:	DIN EN ISO 228-1
Filettatura	DIN EN ISO 228-1