


SR

Schalldämpfer

Silencer

Silenziatore ad innesto con codolo

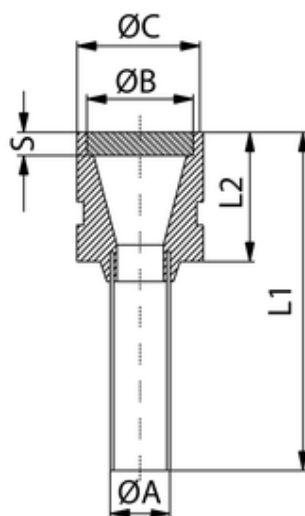

ITV	ØA	ØB	ØC	L1	L2	S
303185	10	8	12	48,5	13,5	4

Körper:	Messing, vernickelt
Body:	brass, nickel-plated
Corpo:	ottone nichelato e materiale plastico
Filter:	Sinterbronze
Filter:	sintered bronze
Filtro:	bronzo sferico sinterizzato
Betriebsdruck:	max. 12 bar
Working pressure:	max. 12 bar
Pressione di esercizio:	max. 12 bar
Betriebstemperatur:	0 °C bis +150 °C
Working temperature:	0 °C up to +150 °C
Temperatura di esercizio:	da 0 °C a +150 °C