


Rückschlagventil

mit Sechskant

Non-return valve, with hexagon

Valvola di non ritorno F.F.

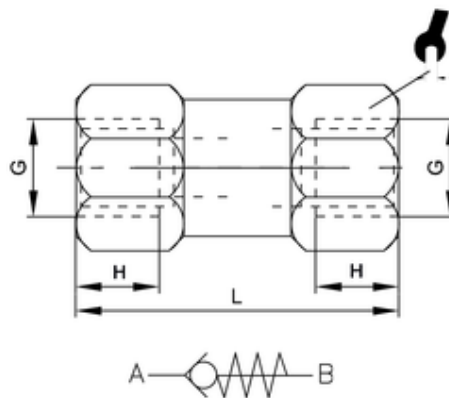

| ITV | G | H | L | sw | NI/min* |
|--------|------|----|----|----|---------|
| 304055 | G1/2 | 14 | 62 | 24 | 3500 |

| | |
|---------------------------|-------------------------|
| Körper: | CW614N vernickelt |
| Body: | CW614N nickel-plated |
| Corpo: | ottone CW614N nichelato |
| O-Ring: | NBR |
| O-ring: | NBR |
| O-Ring: | NBR 70 SH |
| zyl. Gewinde: | DIN EN ISO 228 |
| cyl. Threads: | DIN EN ISO 228 |
| Filettatura: | gas cilindrica ISO 228 |
| Betriebstemperatur: | -10 °C bis +70 °C |
| Working temperature: | -10 °C up to +70 °C |
| Temperatura di esercizio: | da -10 °C a +70 °C |
| Betriebsdruck: | max. 10 bar |
| Working pressure: | max. 10 bar |
| Pressione di esercizio: | max. 10 bar |

Für geölte und ungeölte Druckluft.

For lubricated and non-lubricated compressed air.

Per aria compressa sia lubrificata che non.