


STX 028 Edelstahl

Drosselrückschlagventil mit Ringstück, Typ A, Zuluft drosselbar

Unidirectional flow regulator type A for valves (stainless steel)

Regolatore di flusso unidirezionale per cilindro tipo A - Inox

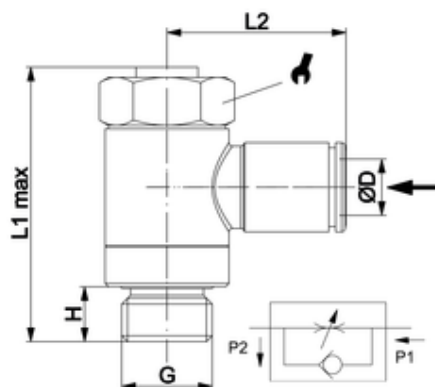

| ITV | ØD | G | H | L1 max | L2 | sw |
|-----------|----|------|-----|--------|------|----|
| 304706-ES | 6 | G1/4 | 8,0 | 40 | 24,5 | 17 |

| | |
|---|------------------------|
| Körper: | AISI 316L |
| Body: | AISI 316L |
| Corpo: | AISI 316L |
| O-Ring: | FKM |
| O-ring: | FKM |
| O-Ring: | FKM |
| Dichtungen: | FKM |
| Seals: | FKM |
| Rondella di tenuta sul filetto: | FKM |
| zyl. Gewinde: | DIN EN ISO 228 |
| cyl. Threads: | DIN EN ISO 228 |
| Filettatura: | gas cilindrica ISO 228 |
| Betriebstemperatur: | -20 °C bis +150 °C |
| Working temperature: | -20 °C up to +150 °C |
| Temperatura di esercizio: | da -20 °C a +150 °C |
| Betriebsdruck: | -0,98 bis 16 bar |
| Working pressure: | -0,98 up to 16 bar |
| Pressione di esercizio: | da -0,98 a 16 bar |
| Für geölte und ungeölte Druckluft. | |
| For lubricated and non-lubricated compressed air. | |
| Per aria compressa sia lubrificata che non. | |