


ipso 029

Drosselrückschlagventil mit Ringstück Typ B Abluft drosselbar

Unidirectional flow regulator type B for cylinders

Regolatore di flusso unidirezionale per cilindri tipo B

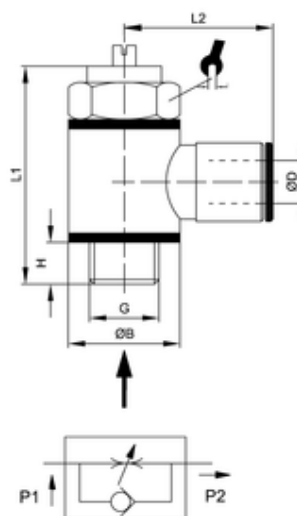

| ITV | ØD | G | H | ØB | L1 | L2 | sw | NI/min* |
|--------|----|------|-----|----|----|------|----|---------|
| 304811 | 10 | G3/8 | 6,5 | 21 | 46 | 28,5 | 20 | 1050 |

| | |
|---------------------------------------------------|-------------------------|
| Körper: | CW617N vernickelt |
| Body: | CW617N nickel-plated |
| Corpo: | ottone CW617N nichelato |
| O-Ring: | NBR |
| O-ring: | NBR |
| O-Ring: | NBR 70 SH |
| Dichtungen: | Kunststoff |
| Seals: | Plastics |
| Rondella di tenuta sul filetto: | tecnopolimero |
| zyl. Gewinde: | DIN EN ISO 228 |
| cyl. Threads: | DIN EN ISO 228 |
| Filettatura: | gas cilindrica ISO 228 |
| Betriebstemperatur: | -20 °C bis +70 °C |
| Working temperature: | -20 °C up to +70 °C |
| Temperatura di esercizio: | da -20 °C a +70 °C |
| Betriebsdruck: | max. 10 bar |
| Working pressure: | max. 10 bar |
| Pressione di esercizio: | max. 10 bar |
| Für geölte und ungeölte Druckluft. | |
| For lubricated and non-lubricated compressed air. | |
| Per aria compressa sia lubrificata che non. | |