


Drosselrückschlagventil

Kunststoff-Steckanschluss

Acetal Line Flow Regulator

Regolatore di flusso in linea con corpo in resina acetalica

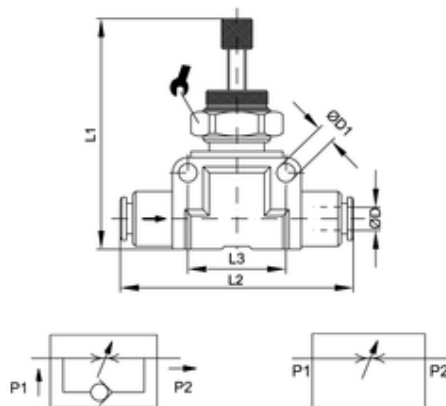

ITV	ØD	ØD1	L1	L2	L3	sw	NI/min*
340818	8	3,2	46	46	16	14	360

Körper:	Kunststoff
Body:	Plastics
Corpo:	resina acetalica
O-Ring:	NBR
O-ring:	NBR
O-Ring:	NBR 70 SH
zyl. Gewinde:	DIN EN ISO 228
cyl. Threads:	DIN EN ISO 228
Filettatura:	gas cilindrica ISO 228
Betriebstemperatur:	-20 °C bis +70 °C
Working temperature:	-20 °C up to +70 °C
Temperatura di esercizio:	da -20 °C a +70 °C
Betriebsdruck:	max. 10 bar
Working pressure:	max. 10 bar
Pressione di esercizio:	max. 10 bar
Für geölte und ungeölte Druckluft.	
For lubricated and non-lubricated compressed air.	
Per aria compressa sia lubrificata che non.	