


# Standrohrverschraubung

Blank  
 Parallel straight adaptor, uncoated  
 Adattatore maschio cilindrico con attacco portagomma

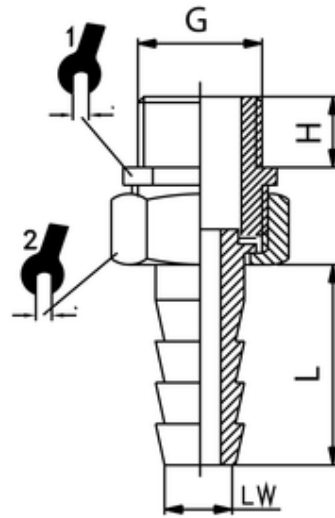

ITV	G	LW	H	L	sw1	sw2
401403	G3/4	19	10	25	34	42

<b>Betriebstemperatur:</b>	max. 150°C					
<b>Betriebsdruck:</b>	bis 60bar					
<b>Werkstoff:</b>	Messing vernickelt/ blank CW614N und CW617N					
<b>Gewinde:</b>	zyl. Gewinde DIN 3852 kon. Gewinde DIN 3858					
<b>Medium:</b>	Luft, Wasser, Öl, Dampf, etc.					

<b>Operating temperature:</b>	max. 150°C					
<b>Operating pressure:</b>	up to 60bar					
<b>Material:</b>	brass nickel-plated/ polished CW614N and CW617N					
<b>Thread:</b>	cyl. thread DIN 3852 con. thread DIN 3858					
<b>Medium:</b>	Air, water, oil, steam, etc.					