


# Standrohrverschraubung

Blank

Parallel straight adaptor, uncoated

Adattatore maschio cilindrico con attacco portagomma

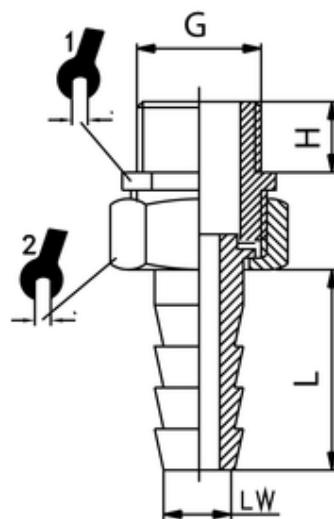

ITV	G	LW	H	L	sw1	sw2
401406	G1 1/2	38	18	47	55	58

<b>Betriebstemperatur:</b>	max. 150°C	
<b>Betriebsdruck:</b>	bis 60bar	
<b>Werkstoff:</b>	Messing vernickelt/ blank	CW614N und CW617N
<b>Gewinde:</b>	zyl. Gewinde DIN 3852 kon. Gewinde DIN 3858	
<b>Medium:</b>	Luft, Wasser, Öl, Dampf, etc.	

<b>Operating temperature:</b>	max. 150°C	
<b>Operating pressure:</b>	up to 60bar	
<b>Material:</b>	brass nickel-plated/ polished CW614N and CW617N	
<b>Thread:</b>	cyl. thread DIN 3852 con. thread DIN 3858	
<b>Medium:</b>	Air, water, oil, steam, etc.	