

Kugelhahn 40

IG-IG
Ball valve 40 FF

voller Durchgang full opening area

Betriebstemperatur - operating temperature

Gehäuse - body:

Kugel - ball:

Griff - handle:

O-Ring - o-ring:

Dichtungen - seal:

Zylindrisches Gewinde - zyl. thread

Medien - media

-20°C bis +60°C

Messing, vernickelt

Messing, verchromt

beschichteter Stahl

NBR & FKM

PTFE

ISO 7/1 RP

Gase & Druckluft

-20°C to +60°C

Brass nickel-plated

Brass chrome-plated


lined Steel

NBR & FKM

PTFE

ISO 7/1 RP

gases and compressed air

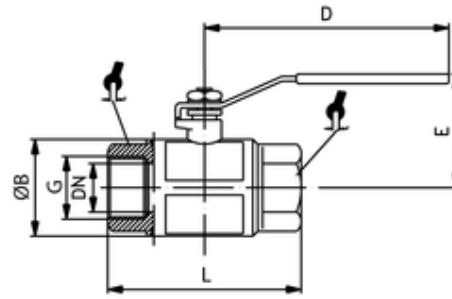

<i>ITV</i>	<i>G</i>	<i>DN</i>	<i>ØB</i>	<i>L</i>	<i>D</i>	<i>E</i>	<i>P</i>	<i>SW</i>
500505	Rp1/2	15	30,5	61	92,5	50,5	5	25

*P = Druck / pressure [bar]