


# Kugelhahn 40

IG-IG

Ball valve 40 FF

Valvola a sfera 40 FF

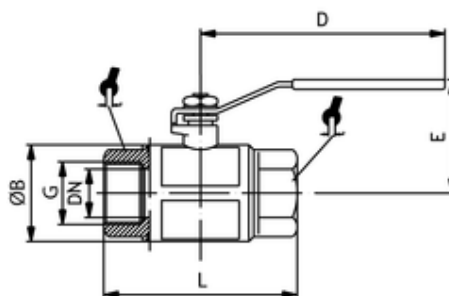

ITV	G	DN	ØB	L	D	E	P*	sw
500508	Rp1 1/4	32	58	99,5	138	76,5	5	47

voller Durchgang

full opening area

Passaggio Totale

Betriebstemperatur: -20 °C bis +60 °C

Operating temperature: -20 °C to +60 °C

Temperatura di esercizio: da -20 °C a +60 °C

Körper: Messing vernickelt

Body: brass nickel-plated

Corpo: ottone nichelato

Kugel: Messing verchromt

Ball: brass chrome-plated

Sfera: ottone cromato

Griff: Stahl, beschichtet

Handle: steel, lined

Leva: in acciaio rivestito

O-Ring: NBR & FKM

O-Ring: NBR & FKM

O-Ring: NBR & FKM

Dichtung: PTFE

Seal: PTFE

Guarnizione: PTFE

Gewinde: ISO 7/1

Thread: DIN EN ISO 228/ ISO 7/1

Filettatura: DIN EN ISO 228/ ISO 7/1

Medien : Gase und Druckluft

Media: gases and compressed air

Media: Gas e aria compressa