


# Kugelhahn 41

## AG-IG

### Ball valve 41 MF

### Valvola a sfera 41 MF

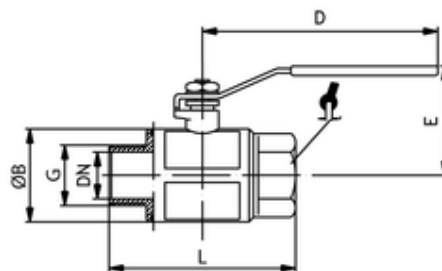

ITV	G	DN	ØB	L	D	E	P*	sw
501505	Rp1/2	15	30,5	68	92,5	50,5	5	25

voller Durchgang

full opening area

Passaggio Totale

Betriebstemperatur: -20 °C bis +60 °C

Operating temperature: -20 °C to +60 °C

Temperatura di esercizio: da -20 °C a +60 °C

Körper: Messing vernickelt

Body: brass nickel-plated

Corpo: ottone nichelato

Kugel: Messing verchromt

Ball: brass chrome-plated

Sfera: ottone cromato

Griff: Stahl, beschichtet

Handle: steel, lined

Leva: in acciaio rivestito

O-Ring: NBR & FKM

O-ring: NBR & FKM

O-Ring: NBR & FKM

Dichtung: PTFE

Seal: PTFE

Guarnizione: PTFE

Gewinde: DIN EN ISO 228 / ISO 7/1

Thread: DIN EN ISO 228 / ISO 7/1

Filettatura: DIN EN ISO 228 / ISO 7/1

Medien: Gase und Druckluft

Media: Gases and compressed air

Media: Gas e aria compressa