


# Schnellentlüftungsventil VSR

Quick exhaust valve

Valvola di scarico rapido

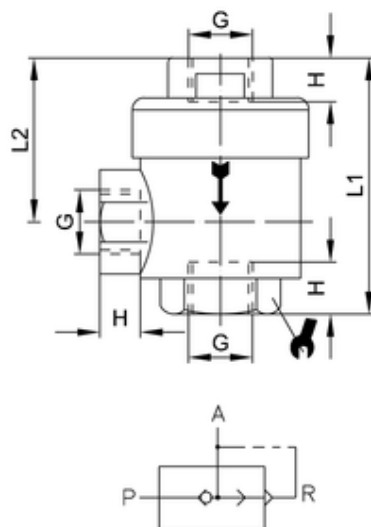

| ITV   | G  | H   | L1 | L2   | sw | NI/min* 1 | NI/min* 2 |
|-------|----|-----|----|------|----|-----------|-----------|
| 60500 | M5 | 4,5 | 25 | 16,5 | 10 | 220       | 300       |

|                                     |                         |
|-------------------------------------|-------------------------|
| Körper:                             | CW617N vernickelt       |
| Body:                               | CW617N nickel-plated    |
| Corpo:                              | ottone CW617N nichelato |
| Dichtung Körper:                    | Nylon                   |
| Seals body:                         | Nylon                   |
| Guarnizione tenuta corpo/coperchio: | Nylon                   |
| Membran:                            | PU                      |
| Membrane:                           | PU                      |
| Elemento di tenuta:                 | PU                      |
| zyl. Gewinde:                       | DIN EN ISO 228          |
| cyl. Threads:                       | DIN EN ISO 228          |
| Filettatura:                        | gas cilindrica ISO 228  |
| Betriebstemperatur:                 | -20 °C bis +80 °C       |
| Working temperature:                | -20 °C up to +80 °C     |
| Temperatura di esercizio:           | da -20 °C a +80 °C      |
| Betriebsdruck:                      | 0,5 - 10 bar            |
| Working pressure:                   | 0,5 - 10 bar            |
| Pressione di esercizio:             | da 0,5 a 10 bar         |

Für geölte und ungeölte Druckluft.  
For lubricated and non-lubricated compressed air.  
Per aria compressa sia lubrificata che non.

NI/min 1: P->A NI/min 2: A->R