


Schnellentlüftungsventil VSR

Quick exhaust valve

Valvola di scarico rapido

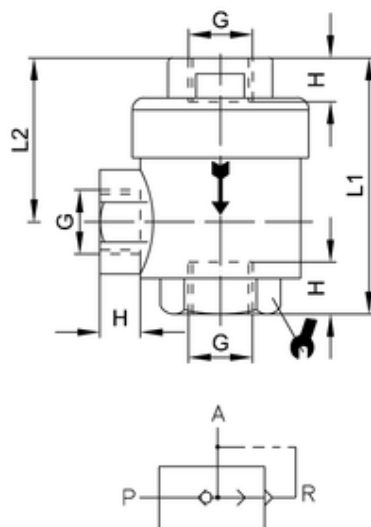

| ITV | G | H | L1 | L2 | sw | NI/min* 1 | NI/min* 2 |
|-------|----|----|----|----|----|-----------|-----------|
| 60506 | G1 | 19 | 94 | 56 | 38 | 2900 | 10750 |

| | |
|-------------------------------------|-------------------------|
| Körper: | CW617N vernickelt |
| Body: | CW617N nickel-plated |
| Corpo: | ottone CW617N nichelato |
| Dichtung Körper: | Nylon |
| Seals body: | Nylon |
| Guarnizione tenuta corpo/coperchio: | Nylon |
| Membran: | PU |
| Membrane: | PU |
| Elemento di tenuta: | PU |
| zyl. Gewinde: | DIN EN ISO 228 |
| cyl. Threads: | DIN EN ISO 228 |
| Filettatura: | gas cilindrica ISO 228 |
| Betriebstemperatur: | -20 °C bis +80 °C |
| Working temperature: | -20 °C up to +80 °C |
| Temperatura di esercizio: | da -20 °C a +80 °C |
| Betriebsdruck: | 0,5 - 10 bar |
| Working pressure: | 0,5 - 10 bar |
| Pressione di esercizio: | da 0,5 a 10 bar |

Für geölte und ungeölte Druckluft.

For lubricated and non-lubricated compressed air.

Per aria compressa sia lubrificata che non.

NI/min 1: P->A NI/min 2: A->R