


FR

Filterregler
Filter regulator

| | | | |
|---|--------------------|--------------------|---------------------|
| Filterregler - Filter regulator | 1/4" | 3/8" - 1/2" | 3/4" - 1" |
| Manometeranschluss - Pressure gauge thread | 1/8" | 1/8" | 1/4" |
| Gewicht - Weight | 0,35 kg | 0,9 kg | 2,5 kg |
| Befestigung - Wall clamp screw | M4x40 | M4x50 | M6x75 |
| Behältergröße - capacity of the cup | 20 cm ³ | 60 cm ³ | 100 cm ³ |
| Regelbereich - Pressure adjusting range | 0-12 bar | 0-12 bar | 0-12 bar |
| max. Betriebsdruck - max. Inlet pressure | 18 bar | 18 bar | 18 bar |
| Durchfluss bei 6 bar - Flow rate at 6 bar | 850 NI/min | 2.600 NI/min | 12.000 NI/min |
| max. Temperatur bei 10 bar - max. Temperature at 10 bar | +50°C | +50°C | +50°C |

| | |
|--------------------------------------|---|
| Einbauposition - Mounting position | vertikal - vertikal |
| Kondensatablass - drainage system | manuell/halbautomatisch - manual/semi automatic |
| Abscheidegrad - degree of filtration | 20µ |
| Medium - fluid | Luft - air |

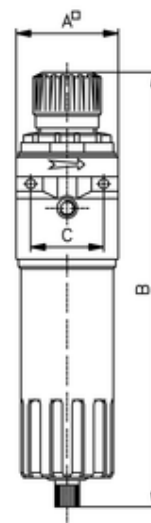

| <i>ITV</i> | <i>G</i> | <i>A</i> | <i>B</i> | <i>C</i> |
|------------|----------|----------|----------|----------|
| 911012 | G1/4 | 42 | 184 | 32-34 |