


# FIL

Filter  
Filter  
Filtro

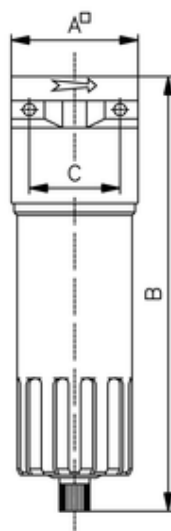

ITV	G	A	B	C	NI/min*	BG*	Bef**
924001	G3/4	80	235	64	9.600	170	M6x75

max. Betriebsdruck	18 bar
max. Inlet pressure	18 bar
Pressione max di ingresso	18 bar
max. Temperatur bei 10 bar	+50 °C
max. temperature at 10 bar	+50 °C
Temperatura max a 10 bar	+50 °C
Einbauposition	beliebig
Mounting position	any position
Posizione di montaggio	in qualsiasi posizione
Kondensatablass	manuell / halbautomatisch
Drainage system	manual / semi automatic
Sistema di drenaggio	manuale / semi automatico
Abscheidegrad	20 µ
Degree of filtration	20 µ
Grado di filtrazione	20 µ
Medium	Luft
Fluid	air
Fluido di passaggio	aria

BG\* - Behältergröße /cm<sup>3</sup> - Bowl capacity /cm<sup>3</sup> - Capacità della tazza /cm<sup>3</sup> Bef\*\* - Befestigung - Wall clamp screws - Viti di fissaggio a parete