


# Abluftdrossel mit Schalldämpfer

Flow regulator Type B for cylinders with silencer  
Regolatore di flusso con silenziatore

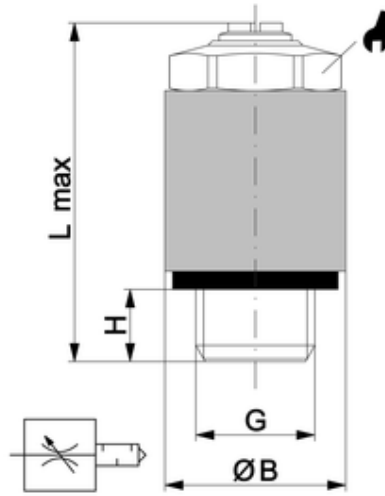

ITV	G	H	L max.	ØB	sw	dB	NI/min
B303333	G1/4	8	37,5	20	17	77	1660

Drossel:	Messing vernickelt
Flow regulator:	brass nickel plated
Regolatore di flusso:	ottone
Schalldämpfer:	Edelstahl
Silencer:	stainless steel
Silenziatore:	Inox
Dichtung:	PVC
Seal:	PVC
Guarnizioni:	PVC
Betriebsdruck:	max. 10 bar
Working pressure:	max. 10 bar
Pressione di esercizio:	max. 10 bar
Temperatur:	-25 °C bis +70 °C
Temperature:	-25 °C up to +70 °C
Temperatura di esercizio:	da -25 °C a +70 °C
Medium:	Geölte und ungeölte Druckluft.
Media:	Greased and non-greased compressed air.
Medium:	Per aria compressa sia lubrificata che non.