


FR

Filterregler
Filter regulator

Filterregler - Filter regulator	1/4"	3/8" - 1/2"	3/4" - 1"
Manometeranschluss - Pressure gauge thread	1/8"	1/8"	1/4"
Gewicht - Weight	0,35 kg	0,9 kg	2,5 kg
Befestigung - Wall clamp screw	M4x40	M4x50	M6x75
Behältergröße - capacity of the cup	20 cm ³	60 cm ³	100 cm ³
Regelbereich - Pressure adjusting range	0-12 bar	0-12 bar	0-12 bar
max. Betriebsdruck - max. Inlet pressure	18 bar	18 bar	18 bar
Durchfluss bei 6 bar - Flow rate at 6 bar	850 NI/min	2.600 NI/min	12.000 NI/min
max. Temperatur bei 10 bar - max. Temperature at 10 bar	+50°C	+50°C	+50°C
Einbauposition - Mounting position	vertikal - vertikal		
Kondensatablass - drainage system	manuell/halbautomatisch - manual/semi automatic		
Abscheidegrad - degree of filtration	20µ		
Medium - fluid	Luft - air		

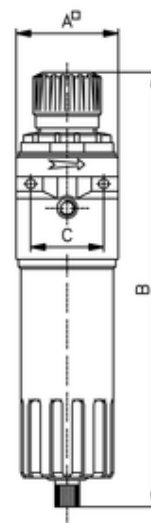

<i>ITV</i>	<i>G</i>	<i>A</i>	<i>B</i>	<i>C</i>
912012	G3/8	60	227	46